

TRUCK AND BUS TIRES CATALOG 2023



JINYU TIRES

ENTERPRISE INTRODUCTION

Enterprise Profile

JINYU Tire Group Co., Ltd. was founded in 1995, which is a professional tire R&D and manufacturing enterprise. The company has total assets of 5.5 billion Yuan and there are more than 3500 employees. By equipped with advanced tire production, research and development, testing equipment and professional technology, management team, the company has established a sound quality management system. There are two plants respectively located in China and Vietnam with total capacity of 6 million pcs/year. The company has set up sales centers in North America, Europe, Vietnam and other countries in local operation. The sales network covers more than 100 countries and regions in the Middle East, Asia, Europe, the United States, Africa and so on.

Jinyu Certificates

The company has obtained certificates like CCC, DOT, ECE, INMETRO, ISO/TS16949, GCC, SONCAP, TBS, SARS and so on. The company's laboratory has been certified by CNAS and ISO/IEC 17025 and obtained many national Patents.

Research and Development

The company believes proving excellent quality is a way of life and takes every opportunity to instill this value throughout the entire enterprise. As proof of this commitment, a considerable investment has been made in R&D over the last 20 years. The R&D center not only utilizes advanced equipment but also commits to having efficient operations and maintaining a strong teamwork culture. The team is hyper-focused on marketing, product planning, formula research and development, as well as, structure design and product testing.

Enterprise Mission

Concentrate on rubber tire technology and service development and application;
Commit ourselves to providing customers the best value and experience.

Enterprise Vision

To be the best tire supplier, trusted globally and able to provide the best value and experience to customers and end-users.

Jinyu firmly adheres to the enterprise spirit, "Common benefit is above all" and the company's target of "Providing the customers with excellent quality products and a high level of service." We insist on focusing on our customer's demands, committing to our promises, operating legally, and developing scientifically to maximize the common benefit of consumers, distributors, suppliers, employees, shareholders, communities, governments, enterprises and other related parties.

"Common benefit is above all"!



Hi, I'm JIMI

We are committed to becoming the most trusted and creative business partner in the world, providing customers with the most cost-effective products and the finest customer service.



Steer

P09 JF518
P10 JF568
P12 JY522

Drive


P14 JD565	P21 JY719
P15 JD575	P22 JD720
P16 JY711	P23 JD721
P17 JY958	P24 JD755
P18 JD571	P25 JD758
P19 JD577	P26 JD660
P20 JD727	P27 JD681

Trailer


P29 JT530
P30 JT560
P31 JT578
P32 JT586
P33 JY598
P56 JY529
P65 JW593

All-Position

P35 JA626	P44 JA661	P53 JY716
P36 JD690	P45 JA665	P55 COACH
P37 JA767	P46 JA906	P58 JU555
P38 JA511	P47 JD762	P59 JU551
P39 JY601	P48 JD786	P60 JU558
P40 JY602	P49 JD703	P62 JW590
P41 JY566	P50 JD756	P63 JW591
P42 JA525	P51 JD766	P64 JW592
P43 JA526	P52 JD785	

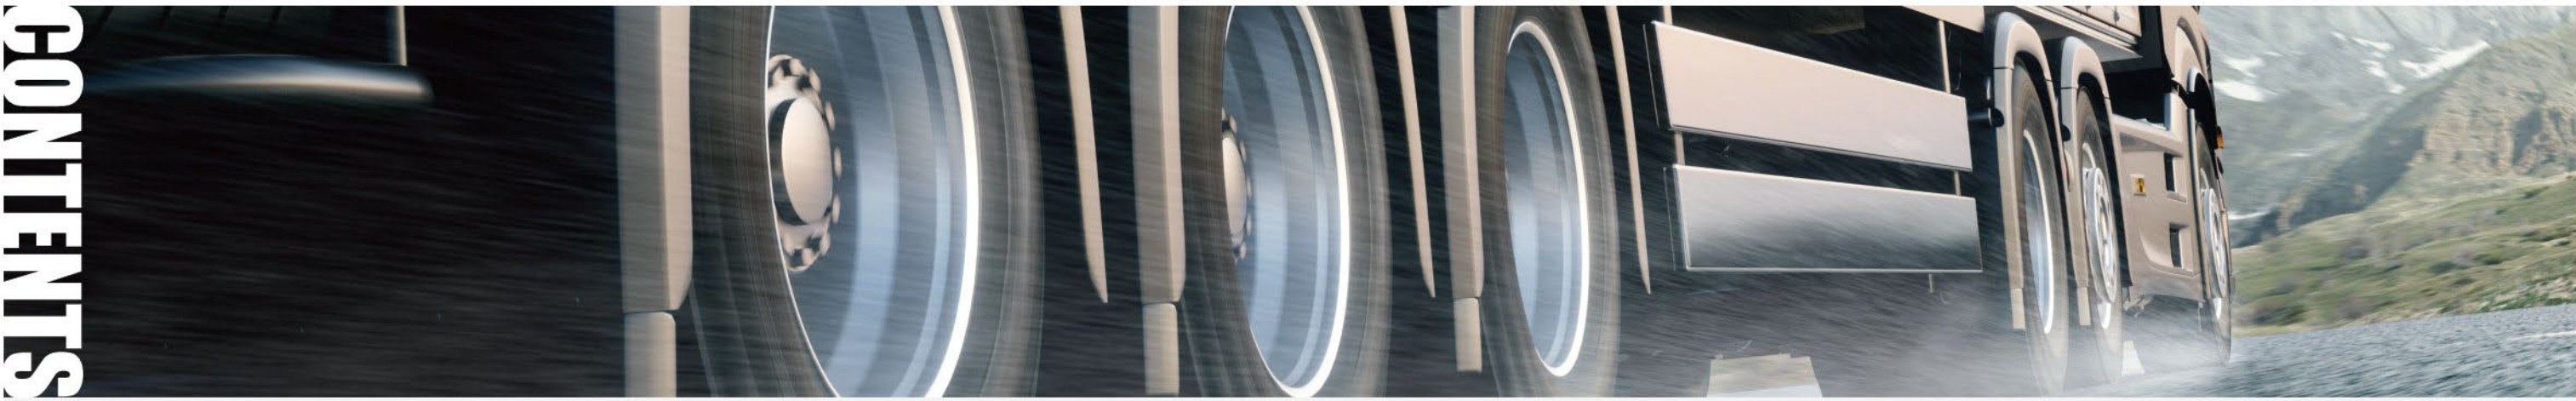

Steer	Drive	PATTERN	REFERENCE	Trailer	All-Position
 P09 JF518	 P14 JD565  P19 JD577		Long Haul	 P29 JT530  P30 JT560	 P62 JW590  P63 JW591
				 P31 JT578  P65 JW593	 P64 JW592
 P10-11 JF568  P12 JY522	 P15 JD575  P16 JY711		Regional	 P32 JT586  P33 JY598	 P37 JA767  P38 JA511
	 P17 JY958  P18 JD571			 P56 JY529	 P41 JY566
	 P22 JD720				

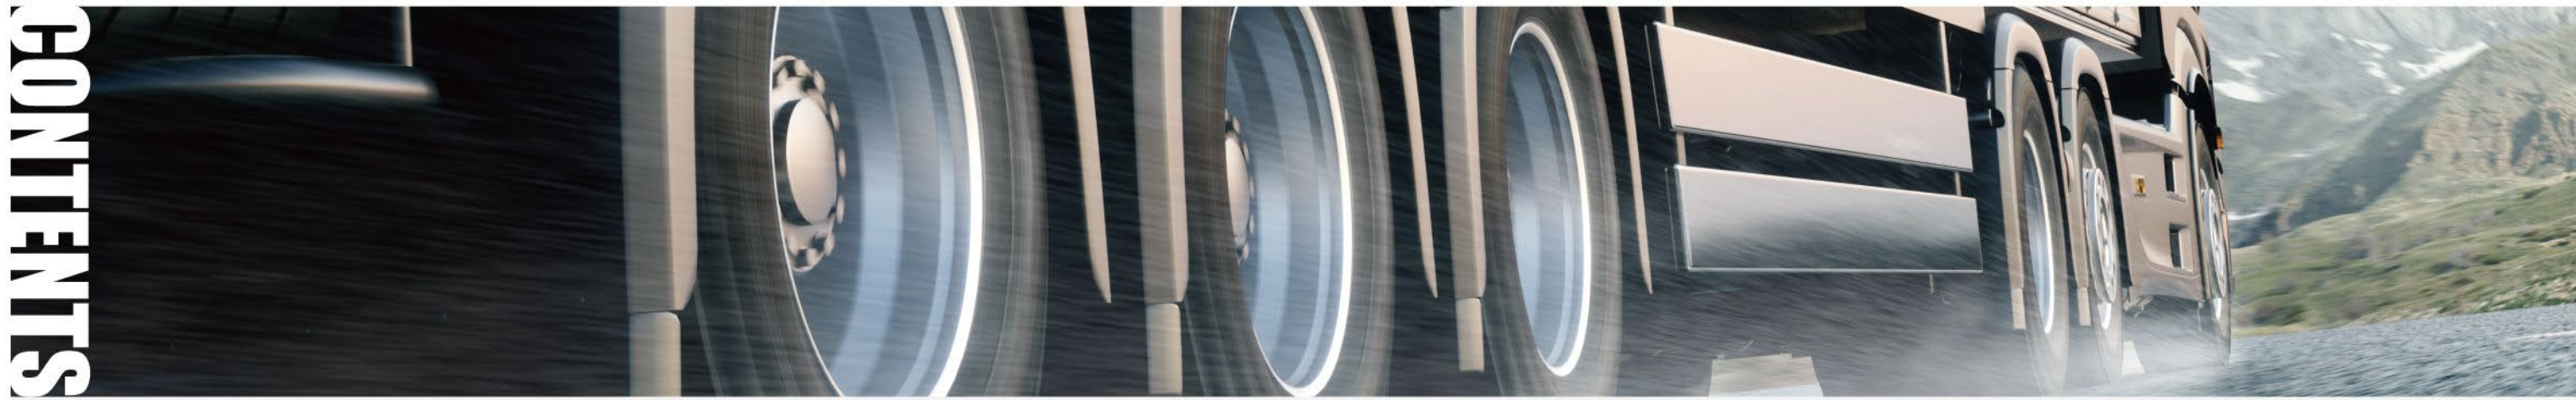

Drive



P20 JD727 P21 JY719 P23 JD721 P24 JD755



P25 JD758 P26 JD660 P27 JD681

PATTERN REFERENCE



On&Off Road

All-Position



P35 JA626 P36 JD690 P39 JY601 P40 JY602



P42 JA525 P43 JA526 P44 JA661 P45 JA665 P46 JA906



Off Road



P47JD762 P48JD786 P49JD703 P50JD756



P51JD766 P52JD785 P53JY716



COACH/Urban



P55 COACH P58 JU555 P59 JU551 P60 JU558

STEER

JF518



High Speed



Reduced Noise



High Durability



High Strength

- Excellent Stability on Handling
- Outstanding High Speed Performance
- Low Heat Generation & Wear Resistance
- Superior Ride Comfort



Suitable 




The smooth tread design solves the irregular-wear problems of most competitor products. Straight sidewall, good absorption and cushioning, comfortable driving experience.

Add white carbon black and nano-filler, adopt high-dispersion technology, uniformly wear, and increase product mileage by 12%.

Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•		11R22.5	16	148/145 M	8.25	3150	2900	6940	6395	850	850	123	123	16.5	1054	279
•	•	12R22.5	18	152/149 L	9.00	3550	3250	7830	7160	930	930	135	135	17	1085	300
	•	205/75R17.5	14	124/122 M	6.00	1600	1500	3525	3310	750	750	110	110	13	753	204
•	•	215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
•	•	235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
	•	245/70R17.5	18	143/141 J	7.50	2725	2575	6005	5675	875	875	125	125	13	813	248
	•	225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
	•	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	13	839	248
•	•	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262
	•	285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	14	895	283
	•	255/70R22.5	16	140/137 M	7.50	2500	2300	5510	5070	830	830	120	120	12.5	930	255
	•	275/70R22.5	16	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	15	958	276
•		275/70R22.5	18	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	15	958	276
	•	295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	15	926	292
	•	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	900	900	130	130	16	1044	298
	•	315/60R22.5	18	154/150 L	9.75	3750	3350	8270	7390	900	900	130	130	14.5	950	313
	•	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7390	900	900	130	130	15.5	1014	312
•		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8050	850	850	120	120	16.5	1076	312
	•	315/80R22.5	20	156/150 L(154/150 M)	9.00	4000	3350	8820	7390	850	850	125	125	16.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JF568

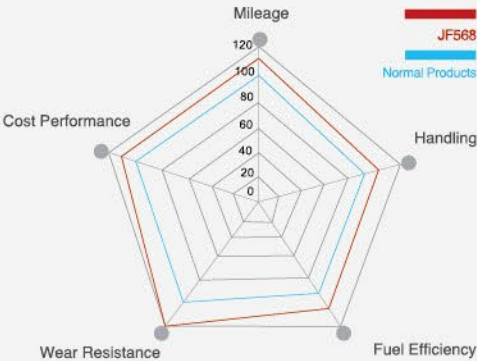

- Stability**
The tread groove design provides excellent stability and greater mileage.
- High Scrub Resistance**
Special tread rubber formula offers better scrub resistance.
- Excellent Handling**
Unique groove design provides excellent handling.
- Economical and Green**
Low rolling resistance reduces fuel consumption making the tire both economical and green.


High Speed


Reduced Noise


High Durability


High Strength

Suitable   



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•		8.5R17.5	12	121/120	M	6.00	1450	1400	3195	3085	625	625	90	90	11	802	215
•		9.5R17.5	18	143/141	J	6.75	2725	2575	6005	5675	875	875	125	125	13.5	842	240
•		10R22.5	16	144/142	L	7.50	2800	2650	6175	5840	900	900	130	130	14.5	1020	254
•	•	11R22.5	16	148/145	M	8.25	3150	2900	6940	6395	840	840	120	120	15	1054	279
•		12R22.5	18	152/149	L	9.00	3550	3250	7830	7160	930	930	135	135	16	1085	300
•		13R22.5	18	154/151	K	9.75	3750	3450	8270	7605	830	830	120	120	17	1124	320
•		9R22.5	14	136/134	M	6.75	2240	2120	4940	4675	830	830	120	120	13.5	974	229
	•	11R24.5	14	146/143	L	8.25	3000	2725	6610	6005	720	720	105	105	16.5	1104	279
•	•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	16.5	1104	279
•	•	205/75R17.5	14	124/122	M	6.00	1600	1500	3525	3315	750	750	110	110	13	753	204
	•	215/75R17.5	16	135/133	J	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
•	•	215/75R17.5	16	135/133	L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
•		225/80R17.5	18	123/122	L	6.75	1550	1500	3415	3305	700	700	102	102	13.5	805	226
•	•	235/75R17.5	18	143/141	L	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
•		245/70R17.5	18	134/132	L	7.50	2120	2000	4675	4410	900	900	130	130	13	813	250
•		225/70R19.5	14	128/126	L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
•		245/70R19.5	16	136/134	M	7.50	2240	2120	4940	4675	830	830	120	120	13	839	248

Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	13	839	248
•		265/70R19.5	16	140/138	M	7.50	2500	2360	5510	5205	760	760	110	110	13.5	867	262
•		265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262
•		285/70R19.5	18	150/148	K	8.25	3350	3150	7390	6945	900	900	130	130	13	895	283
•		255/70R22.5	16	140/137	M	7.50	2500	2300	5510	5070	830	830	120	120	13.5	930	255
•		275/70R22.5	16	148/145	M	8.25	3150	2900	6945	6395	900	900	130	130	14.5	958	276
•	•	275/80R22.5	18	149/146	L	8.25	3250	3000	7160	6610	900	900	130	130	16	1012	276
•		295/60R22.5	18	150/147	L	9.00	3350	3075	7390	6780	900	900	130	130	14.5	926	292
•	•	295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	16.5	1014	298
•	•	295/75R22.5	16	146/143	L	9.00	3000	2725	6610	6005	830	830	120	120	16.5	1014	298
•		295/80R22.5	18	152/149	M	9.00	3550	3250	7825	7165	900	900	130	130	16	1044	298
•	•	295/80R22.5	18	154/149	M	9.00	3750	3250	8270	7160	850	850	125	125	16	1044	298
•		315/60R22.5	18	152/148	L	9.75	3550	3150	7825	6945	900	900	130	130	14.5	950	313
•	•	315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	15.5	1014	312
•		315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8050	850	850	125	125	16.5	1076	312
•	•	315/80R22.5	20	156/150 L(154/150 M)		9.00	4000	3350	8820	7390	850	850	125	125	16.5	1076	312
•	•	285/75R24.5	14	144/141	L	8.25	2800	2575	6175	5675	760	760	110	110	16.5	1050	283
•	•	285/75R24.5	16	147/144	L	8.25	3075	2800	6780	6175	830	830	120	120	16.5	1050	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY522



Reduced Noise



High Durability



High Strength



Wide Section

- Ultra Wear Resistance
- Avoid Damage on Tread
- Excellent CPK
- Outstanding High Speed Performance




Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	146/143 L	8.25	3000	2725	6610	6010	830	830	120	120	15.5	1054	279
•		12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	16	1085	300
•		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	16	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

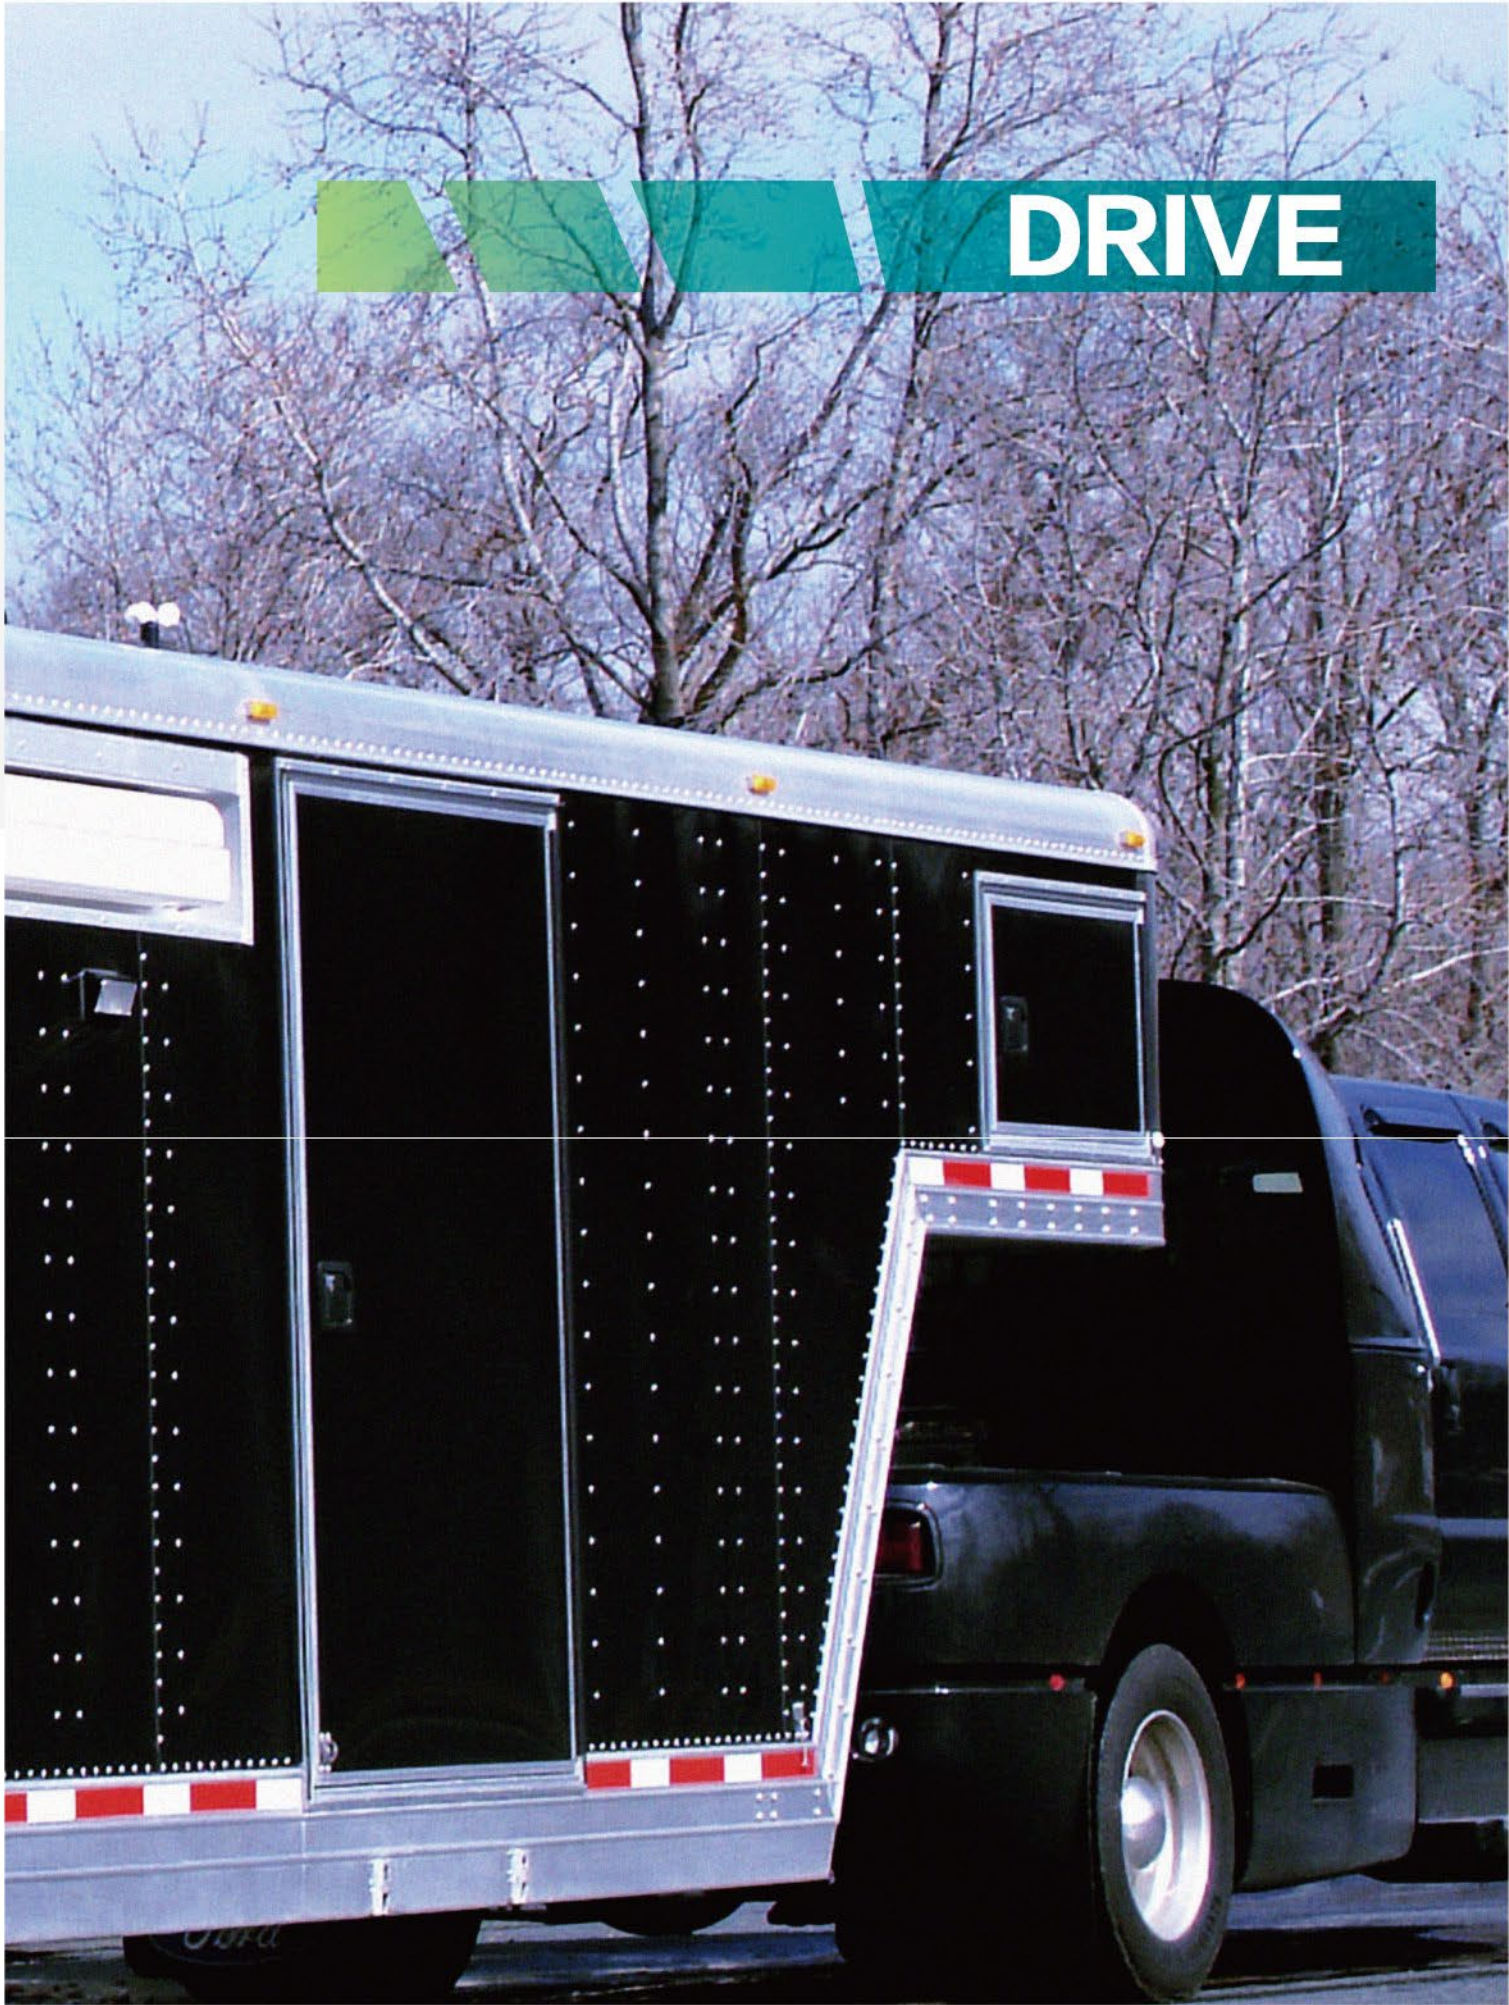

JD565


High Durability


High Strength


Excellent Grip

- Low Heat Generation & Wear Resistance
- Fuel efficiency
- Outstanding High Speed Performance



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•	•	295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	17	1044	298
•	•	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	18	1014	312
•	•	315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8050	850	850	125	125	18	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD575


High Speed


High Durability


Excellent Grip

- Chip Resistance
- High Load Capacity
- Economy and Environment Friendly



Suitable 



Origin		Size	PR	LI/ SS		Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
							(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN						S	D	S	D	S	D	S	D			
•	•	205/75R17.5	14	124/122	L	6.00	1600	1500	3525	3310	750	750	110	110	15	753	204
•	•	215/75R17.5	16	135/133	L	6.00	2180	2060	4805	4540	860	860	125	125	15	767	211
•	•	235/75R17.5	18	143/141	L	6.75	2725	2575	6005	5675	860	860	125	125	15	797	233
•		225/70R19.5	14	128/126	L	6.75	1800	1700	3970	3750	760	760	110	110	15	817	226
•	•	245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	15.5	839	248
•		265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•		285/70R19.5	18	150/148	K	8.25	3350	3150	7390	6945	900	900	130	130	16	895	283
•		255/70R22.5	16	140/137	L	7.50	2500	2300	5510	5070	830	830	120	120	19.5	930	255
•		275/70R22.5	16	148/145	M	8.25	3150	2900	6945	6395	900	900	130	130	20	958	276
•		295/60R22.5	18	150/147	L	9.00	3350	3075	7390	6780	900	900	130	130	19	926	292
•	•	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	22	1044	298
•		315/60R22.5	18	152/148	L	9.75	3550	3150	7825	6945	900	900	130	130	20	950	313
•	•	315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	20	1014	312
•		315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8050	850	850	125	125	22.5	1076	312
•	•	315/80R22.5	20	156/150 L(154/150 M)		9.00	4000	3350	8820	7390	850	850	125	125	22.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY711

- 
High Speed
- 
High Durability
- 
High Strength
- 
Excellent Grip

- Chip Resistance
- Low Wear & Deep Tread
- Fuel efficiency
- High Load Capacity



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	21.5	1059	279
•		12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	22.5	1096	300
•		13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	23.5	1124	320
•		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	24.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY958

- 
High Speed
- 
High Durability
- 
Excellent Grip

- Chip Resistance
- Excellent Stability on Handling
- Economy and Environment Friendly




Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	146/143 K	8.25	3000	2725	6610	6010	830	830	120	120	19.5	1059	279
•		12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
•		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	20	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD571

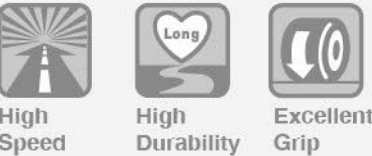

- Chip and Cut Resistance
- Adapt to Various Road Conditions



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	14	144/142 L	8.25	2800	2650	6175	5840	720	720	105	105	23.5	1059	279
•	•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	23.5	1059	279
•		11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	23.5	1110	279
•	•	11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1110	279
•	•	295/75R22.5	14	144/141 L	9.00	2800	2575	6175	5675	760	760	110	110	23.5	1020	298
•	•	295/75R22.5	16	146/143 L	9.00	3000	2725	6610	6005	830	830	120	120	23.5	1020	298
•	•	285/75R24.5	14	144/141 L	8.25	2800	2575	6175	5675	760	760	110	110	23.5	1056	283
•	•	285/75R24.5	16	147/144 L	8.25	3075	2800	6780	6175	830	830	120	120	23.5	1056	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD577



- Low Heat Generation & Wear Resistance
- Excellent CPK
- Superior Ride Comfort



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•		285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	16	895	283
•		275/70R22.5	16	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	18	958	276
•		275/80R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	22	1012	276
•		295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	18	926	292
•		315/60R22.5	18	152/148 L	9.75	3550	3150	7825	6945	900	900	130	130	18	950	313
•		315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7390	900	900	130	130	19	1014	312
•		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8050	850	850	125	125	20	1076	312
•		315/80R22.5	20	156/150 L(154/150 M)	9.00	4000	3350	8820	7390	850	850	125	125	20	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD727



- Chip Resistance
- Excellent Grip
- Adapt to Various Road Conditions



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		9.5R17.5	18	143/141	M	6.75	2725	2575	6005	5675	875	875	125	125	16.5	850	240
•		11R22.5	18	148/145	L	8.25	3150	2900	6940	6395	850	850	123	123	22.5	1059	279
•		12R22.5	18	152/149	K	9.00	3550	3250	7830	7160	930	930	135	135	20	1096	300
•		11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	22.5	1110	279
•		225/80R17.5	18	123/122	L	6.75	1550	1500	3415	3305	700	700	102	102	14	811	226
•		265/70R19.5	18	143/141	K	7.50	2725	2575	6005	5675	900	900	130	130	15	867	262
•		275/70R22.5	18	148/145	M	8.25	3150	2900	6940	6395	900	900	130	130	17	958	276
•		295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	19.5	1044	298
•	•	325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	125	125	20	1228	325
	•	11.00R20	18	152/149	K	8.00	3550	3250	7830	7170	930	930	135	135	19.5	1096	293
	•	12.00R20	20	156/153	K	8.50	4000	3650	8820	8050	900	900	130	130	21	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY719



- Chip Resistance
- Excellent Grip
- Adapt to Various Road Conditions



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•		9.5R17.5	18	143/141	K	6.75	2725	2575	6005	5675	875	875	125	125	17	850	240
•		12R22.5	18	152/149	K	9.00	3550	3250	7830	7160	930	930	135	135	20.5	1096	300
•		265/70R19.5	18	143/141	K	7.50	2725	2575	6005	5675	900	900	130	130	15	867	262
•		315/80R22.5	20	157/154	J	9.00	4125	3750	9090	8270	900	900	130	130	19	1076	312
•		325/95R24	20	160/157	K	9.00	4500	4125	9920	9090	900	900	130	130	20	1228	325
•		7.00R16LT	14	118/114	L	5.50F	1320	1180	2910	2600	770	770	110	110	14	775	200
•		7.50R16LT	14	122/118	L	6.00G	1500	1320	3310	2910	770	770	110	110	15.5	815	215
•		8.25R16LT	16	128/124	L	6.50H	1800	1600	3970	3525	770	770	110	110	15.5	865	235
•		8.25R20	16	139/137	K	6.50	2430	2300	5360	5070	930	930	135	135	17	974	236
•		9.00R20	16	144/142	K	7.00	2800	2650	6170	5840	900	900	130	130	18	1030	259
•		10.00R20	18	149/146	K	7.50	3250	3000	7165	6610	930	930	135	135	19	1065	278
•		11.00R20	18	152/149	K	8.00	3550	3250	7830	7170	930	930	135	135	20	1096	293
•		12.00R20	18	154/151	K	8.50	3750	3450	8270	7610	830	830	120	120	21	1136	315
•		12.00R20	20	156/153	K	8.50	4000	3650	8820	8050	850	850	130	130	21	1136	315
•		12.00R24	20	160/157	K	8.50	4500	4125	9920	9090	900	900	130	130	20	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD720



- Chip and Cut Resistance
- Excellent Grip
- Adapt to Various Road Conditions



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	14	144/142 L	8.25	2800	2650	6175	5840	720	720	105	105	21.5	1059	279
•	•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	21.5	1059	279
•		11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	21.5	1110	279
•	•	11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	21.5	1110	279
•		295/75R22.5	14	144/141 L	9.00	2800	2575	6175	5675	760	760	110	110	21.5	1014	298
•		295/75R22.5	16	146/143 L	9.00	3000	2575	6610	6005	830	830	120	120	21.5	1014	298
•		285/75R24.5	14	144/141 L	8.25	2800	2575	6175	5675	760	760	110	110	21.5	1050	283
•		285/75R24.5	16	147/144 L	8.25	3075	280	6780	6175	830	830	120	120	21.5	1050	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD721



- Chip and Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	146/143 K	8.25	3000	2725	6610	6005	830	830	120	120	24.5	1059	279
•		11R24.5	16	149/146 K	8.25	3250	3000	7160	6610	830	830	120	120	24.5	1110	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD755



- Chip and Cut Resistance
- Excellent Grip
- Anti Damage on Tread



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•	•	11R22.5	16	148/145 J	8.25	3150	2900	6945	6395	840	840	120	120	19	1059	279
•	•	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
•	•	13R22.5	20	156/150 J	9.75	4000	3350	8820	7390	900	900	130	130	22	1136	320
	•	13R22.5	20	156/150 K	9.75	4000	3350	8820	7390	900	900	130	130	22	1136	320
•		315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8050	850	850	125	125	22	1076	312
	•	315/80R22.5	20	156/150 J(154/150 K)	9.00	4000	3350	8820	7390	850	850	125	125	22	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD758



- Chip Resistance
- Good Self-Cleaning on Pattern
- Strong Constructure



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•	•	11R22.5	16	148/145 K	8.25	3150	2900	6945	6395	840	840	120	120	19	1059	279
•	•	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
•	•	13R22.5	20	156/150 J	9.75	4000	3350	8820	7390	900	900	130	130	20	1136	320
	•	13R22.5	20	156/150 K	9.75	4000	3350	8820	7390	900	900	130	130	20	1136	320
•		295/80R22.5	18	152/149 K	9.00	3550	3250	7825	7165	900	900	130	130	18	1044	298
•		315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8050	850	850	125	125	20.5	1076	312
	•	315/80R22.5	20	156/150 J(154/150 K)	9.00	4000	3350	8820	7390	850	850	125	125	20.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD660


High Durability


High Strength

- Chip Resistance
- Anti Impact
- High Load Capacity



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		13R22.5	20	156/150 K	9.75	4000	3350	8820	7390	900	900	130	130	18	1124	320

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD681/JD681H


High Durability


High Strength

- Chip Resistance
- Good Grip
- Adapt to Various Road Conditions



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•	•	11.00R20	18	152/149 J	8.00	3550	3250	7830	7170	930	930	135	135	19.5	1096	293
•	•	12.00R20	20	156/153 J	8.50	4000	3650	8820	8050	900	900	130	130	20.5	1136	315
•		*12.00R20	20	156/153 J	8.50	4000	3650	8820	8050	900	900	130	130	20.5	1136	315

*12.00R20 applied to JD681H

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JT530



Wide
Section



High
Durability

- Ultra Wear Resistance
- Excellent Stability on Handling



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•	•	235/75R17.5	18	143/141	J	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
•	•	245/70R17.5	18	143/141	J	7.50	2725	2575	6005	5675	875	875	125	125	13	813	248
•		245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	13.5	839	248

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JT560



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)			
		435/50R19.5	20	160 J	14.00	4500	9920	900	130	12.5	931	438
		445/45R19.5	20	160 J	15.00	4500	9920	900	130	13	895	446
		385/55R22.5	20	160 K	12.25	4500	9920	900	130	14.5	996	386
		385/65R22.5	20	160 K	11.75	4500	9920	900	130	15.5	1072	389
		385/65R22.5	24	164 K	11.75	5000	11000	900	130	15.5	1072	389
		425/65R22.5	20	165 K	12.25	5150	11400	830	120	15.5	1124	422

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JT578



- Outstanding Handling and Brake Performance on Wet
- Ultra Wear Resistance
- Economy and Environment Friendly
- Avoid Damage on Tread



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	148/145 M	8.25	3150	2900	6945	6395	840	840	120	120	15	1054	279
•		12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	15	1085	300
•		325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	125	125	15	1228	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JT586


High Speed


Reduced Noise


High Durability


High Strength

- Excellent Stability on Handling
- Prevent Irregular Shoulder Wear
- High Load Capacity



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•		10.00R20	18	149/146	K	7.50	3250	3000	7165	6610	930	930	135	135	15.5	1054	278
•		11.00R20	18	152/149	K	8.00	3550	3250	7830	7160	930	930	135	135	16	1085	293
•		12.00R20	18	154/151	K	8.50	3750	3450	8270	7610	830	830	120	120	16.5	1125	315
•		12.00R20	20	156/153	K	8.50	4000	3650	8820	8050	900	900	130	130	16.5	1125	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY598


High Speed


High Durability

- Ultra Wear Resistance
- Long Mileage



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)	(lbs)	(kPa)	(PSI)			
CN	VN											
•		385/65R22.5	20	160 K	11.75	4500	9920	900	130	17.5	1072	389
•	•	385/65R22.5	24	164 K	11.75	5000	11000	900	130	17.5	1072	389
•	•	425/65R22.5	20	165 K	12.25	5150	11400	830	120	16.5	1124	422

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

ALL-POSITION

JA626


Reduced Noise


High Durability


High Strength

- Chip Resistance
- Excellent Grip
- Adapt to Various Road Conditions



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)			
	•	385/65R22.5	24	164 K	11.75	5000	11000	900	130	17.5	1072	389
	•	425/65R22.5	20	165 K	12.25	5150	11400	830	120	17.5	1124	422
	•	445/65R22.5	20	169 K	13.00	5800	12800	900	130	17.5	1150	444

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JD690

High Durability

High Strength

Excellent Grip

- Chip and Cut Resistance
- High Stability on Handling



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
•	•	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	815	215
•		8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	13.5	865	235
•		8.25R20	16	139/137 K	6.50	2430	2300	5360	5070	930	930	135	135	15	974	236
•		9.00R20	16	144/142 K	7.00	2800	2650	6170	5840	900	900	130	130	15.5	1030	259
•		10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	16	1065	278
•		11.00R20	18	152/149 K	8.00	3550	3250	7830	7170	930	930	135	135	17.5	1096	293
•		12.00R20	20	156/153 K	8.50	4000	3650	8820	8050	900	900	130	130	18	1136	315
•		12.00R20	22	158/155 J	8.50	4250	3875	9370	8540	970	970	140	140	18	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA767

Reduced Noise

High Durability

High Strength

- Chip Resistance
- Reduce Stone Trapping
- High Load Capacity



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		215/75R17.5	18	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	15	767	211
•		235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	15	797	233
•	•	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	15	867	262
•		275/80R22.5	18	149/146 L	8.25	3250	3000	7160	6610	900	900	130	130	18.5	1012	276
•		295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	18	1044	298
•		10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	15.5	1065	278
•		11.00R20	18	152/149 K	8.00	3550	3250	7830	7170	930	930	135	135	17	1096	293

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JA511

Reduced Noise

High Durability

High Strength

Wide Section

- Ultra Wear Resistance
- High Load Capacity
- Long Life



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		6.50R16LT	12	110/105 L	5.50F	1060	925	2335	2040	670	670	97	97	10.5	750	185
•		7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	200
•	•	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	215
•		8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	13.5	855	235

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY601

Reduced Noise

High Durability

- Excellent Stability on Handling
- Adapt to Various Road Conditions



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•	•	11R22.5	16	148/145 M	8.25	3150	2900	6945	6395	840	840	120	120	16	1054	279
•		12R22.5	18	152/149 K	9.00	3550	3250	7825	6945	850	850	125	125	16.5	1085	300
•		13R22.5	18	154/150 L	9.75	3750	3350	8270	7390	850	850	125	125	16	1124	320
•		11R24.5	16	149/146 M	8.25	3250	3000	7160	6610	830	830	120	120	16	1104	279
•		295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	17.5	1044	298
•		315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8045	850	850	125	125	14	1076	312
•		325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15.5	1228	325
•		7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	200
•	•	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	215
•		8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	12.5	855	235
•		8.25R20	16	139/137 K	6.50	2430	2300	5360	5070	930	930	135	135	13.5	974	236
•		9.00R20	16	144/142 K	7.00	2800	2650	6170	5840	900	900	130	130	15	1019	259
•		10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	16	1054	278
•		11.00R20	18	152/149 K	8.00	3550	3250	7830	7170	930	930	135	135	16.5	1085	293
•		12.00R20	18	154/151 K	8.50	3750	3450	8270	7610	830	830	120	120	17	1125	315
•		12.00R20	20	156/153 K	8.50	4000	3650	8820	8050	900	900	130	130	17	1125	315
•		12.00R24	20	160/157 K	8.50	4500	4125	9925	9100	900	900	130	130	15.5	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JY602

Reduced Noise

High Durability

- Chip Resistance
- Adapt to Various Road Conditions
- Excellent CPK



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		6.50R16LT	12	110/105 L	5.50F	1060	925	2340	2040	670	670	97	97	10.5	750	185
•		11.00R20	18	152/149 K	8.00	3550	3250	7830	7170	930	930	135	135	17	1085	293
•		12.00R20	22	158/155 K	8.50	4250	3875	9370	8540	970	970	140	140	17	1125	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY566

Reduced Noise

High Durability

High Strength

Wide Section

- Excellent Stability on Handling
- High Load Capacity
- Chip Resistance



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	146/143 L	8.25	3000	2725	6610	6010	830	830	120	120	16	1054	279
•		12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	18	1085	300
•		13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	18	1124	320
•		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA525



Reduced Noise



High Durability



High Strength

- Chip and Cut Resistance
- Outstanding High Speed Performance



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	15	1054	278

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA526



High Speed



High Durability

- Chip and Cut Resistance
- Anti Impact
- High Load Capacity



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	125	125	16	1228	325
•		12.00R24	20	160/157 K	8.50	4500	4125	9920	9090	900	900	130	130	16	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA661



- Chip and Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
•	•	325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15.5	1228	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA665



- Ultra Wear Resistance
- High Stability on Handling
- High Load Capacity



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	17.5	1054	279
•	•	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	18	1085	300
	•	13R22.5	18	156/150 L	9.75	3750	3450	8270	7610	875	875	125	125	18	1124	320
•	•	13R22.5	20	156/150 L	9.75	4000	3350	8820	7390	900	900	130	130	18	1124	320
•		11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	17.5	1104	279
•		295/80R22.5	18	152/149 K	9.00	3550	3250	7825	7165	900	900	130	130	18.5	1044	298
•		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312
	•	315/80R22.5	20	161/157 K	9.00	4625	4125	10200	9090	900	900	130	130	17	1076	312
	•	315/80R22.5	20	156/150 L(154/150 M)	9.00	4000	3350	8820	7390	850	850	125	125	17	1076	312
•		12.00R24	20	160/157 K	8.50	4500	4125	9920	9090	900	900	130	130	14.5	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD690


High Durability


High Strength


Excellent Grip

- Ultra Wear Resistance
- Avoid Damage on Tread
- High Stability on Handling



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	16.5	1054	278
•		11.00R20	18	152/149 K	8.00	3550	3250	7830	7170	930	930	135	135	16.5	1085	293
•		12.00R20	20	156/153 K	8.50	4000	3650	8820	8050	900	900	130	130	16.5	1125	315
•		315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8050	850	850	125	125	16.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD762


High Durability


High Strength

- Chip and Cut Resistance
- Anti Impact
- Adapt to Various Road Conditions
- Good Self-Cleaning on Pattern



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
CN	VN															
•		12.00R20	20	156/153 G	8.50	4000	3650	8820	8050	900	900	130	130	24	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD786



- Chip and Cut Resistance
- Anti Impact
- Excellent Grip
- High Load Capacity



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		12.00R20	20	156/153 D	8.50	4000	3650	8820	8050	900	900	130	130	23	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD703



- Chip and Cut Resistance
- Anti Impact
- Excellent Grip



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		12.00R20	20	156/153 D	8.50	4000	3650	8820	8050	900	900	130	130	30	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JD756



- Cut Resistance
- Excellent Grip
- Avoid Damage on Tread



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•		11R22.5	16	148/145	G	8.25	3150	2900	6940	6395	850	850	123	123	24	1065	279
•		12R22.5	18	152/149	G	9.00	3550	3250	7830	7160	930	930	135	135	23.5	1096	300
•		13R22.5	18	156/150	G	9.75	4000	3350	8820	7385	900	900	130	130	23.5	1136	320
•		13R22.5	20	156/150	G	9.75	4000	3350	8820	7385	900	900	130	130	23.5	1136	320
•		11R24.5	16	149/146	G	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1116	279
•	•	295/80R22.5	18	152/149	J	9.00	3550	3250	7825	7165	900	900	130	130	24	1044	298
•		315/80R22.5	20	157/154	G	9.00	4125	3750	9090	8270	900	900	130	130	24	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD766



- Excellent Grip
- Anti Damage on Tread
- High Load Capacity



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				S
•		12.00R24	20	160/157	F	8.50	4500	4125	9920	9090	900	900	130	130	31	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD785



- Chip and Cut Resistance
- Anti Impact
- Adapt to Various Road Conditions
- Good Self-Cleaning on Pattern



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		7.50R16LT	14	122/118 D	6.00G	1500	1320	3310	2910	770	770	110	110	18.5	815	215
•		8.25R16LT	18	128/124 D	6.50H	1800	1600	3970	3530	770	770	110	110	20.5	865	235
•		8.25R20	16	139/137 D	6.50	2430	2300	5360	5070	930	930	135	135	20	974	236
•		9.00R20	18	144/142 D	7.00	2800	2650	6170	5840	900	900	130	130	22	1030	259
•		10.00R20	20	149/146 D	7.50	3250	3000	7165	6610	930	930	135	135	23.5	1065	278
•		11.00R20	18	152/149 D	8.00	3550	3250	7830	7170	930	930	135	135	24	1096	293
•		12.00R20	20	156/153 D	8.50	4000	3650	8820	8050	900	900	130	130	24	1136	315
•	•	12.00R20	22	158/155 D	8.50	4250	3875	9370	8540	970	970	140	140	24	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY716



- Chip and Cut Resistance
- Strong Constructure
- Excellent Grip



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		13R22.5	20	156/150 J	9.75	4000	3350	8820	7390	900	900	130	130	21	1124	320
•		10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	21	1065	278
•		11.00R20	18	152/149 K	8.00	3550	3250	7830	7160	930	930	135	135	21	1096	293
•		12.00R20	22	158/155 D	8.50	4250	3875	9370	8540	970	970	140	140	21	1136	315
•		12.00R24	20	160/157 K	8.50	4500	4125	9920	9090	900	900	130	130	21.5	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



COACH

COACH



Reduced Noise



High Durability



High Strength

- Outstanding Handling and Brake Performance on Wet
- Ultra Wear Resistance
- Superior Ride Comfort
- Lower Fuel Consumption



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		295/80R22.5	18	152/149 M	9.00	3550	3250	7830	7160	900	900	130	130	15	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY529



Reduced Noise



High Durability



High Strength

- Ultra Wear Resistance
- Outstanding High Speed Performance
- Superior Ride Comfort



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
						S	D	S	D	S	D	S	D			
CN	VN															
•		295/80R22.5	18	152/148 M	9.00	3550	3150	7825	6945	850	850	125	125	15	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs





JU555

Reduced Noise

High Durability

High Strength

- Ultra Wear Resistance
- Damage Resistance On Sidewall
- Outstanding High Speed Performance



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
						(kgs)		(lbs)		(kPa)		(PSI)					
CN	VN					S	D	S	D	S	D	S	D				
•		11R22.5	16	148/145	J	8.25	3150	2900	6940	6395	850	850	123	123	20	1054	279
•	•	11R22.5	18	148/145	J	8.25	3150	2900	6940	6395	850	850	123	123	20	1054	279
•		245/70R19.5	16	136/134	M	7.50	2240	2120	4940	4675	830	830	120	120	17.5	839	248
•		245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	17.5	839	248
•		255/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	850	850	123	123	18.5	930	255
•	•	275/70R22.5	18	152/148	J	8.25	3550	3150	7830	6940	900	900	130	130	20.5	958	276
•		305/70R22.5	18	152/150	J	9.00	3550	3350	7830	7390	900	900	130	130	20.5	1000	305
•		305/70R22.5	20	153/150	J	9.00	3650	3350	8050	7390	900	900	130	130	20.5	1000	305

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JU551

Reduced Noise

High Durability

High Strength

- Excellent Grip
- Adapt to Various Road Conditions



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	20.5	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JU558



Reduced Noise



High Durability



High Strength

- Ultra Wear Resistance
- Damage Resistance On Sidewall



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		10R22.5	16	144/142 L	7.50	2800	2650	6175	5840	900	900	130	130	16.5	1020	254

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



JW590




High Durability


Excellent Grip

- Excellent Low-temperature Performance
- Superior Traction on Snow
- Anti Damage on Tread



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	20	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW591




High Durability


Excellent Grip

- Excellent Low-temperature Performance
- Excellent CPK



Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
•		11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	20	1054	279
•		225/80R17.5	14	123/122 L	6.75	1550	1500	3415	3305	700	700	102	102	16	811	226
•		245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	19	839	248
•		265/70R19.5	16	140/138 L	7.50	2500	2360	5510	5205	760	760	110	110	20	867	262
•		275/80R22.5	18	151/148 J	8.25	3450	3150	7160	6940	900	900	130	130	19	1012	276

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW592



- Excellent Low-temperature Performance
- Excellent Stability on Handling
- Superior Traction on Snow



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
						(kgs)		(lbs)		(kPa)		(PSI)				
CN	VN					S	D	S	D	S	D	S	D			
		• 275/70R22.5	16	148/145 L	8.25	3150	2900	6940	6395	900	900	130	130	20.5	958	276
		• 295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	22	1044	298
		• 315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	20.5	1014	312
		• 315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8050	850	850	125	125	20.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW593



- Outstanding Handling and Brake Performance on Wet
- Excellent Low-temperature Performance
- Superior Traction on Snow



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)			
		385/65R22.5	24	164 K	11.75	5000	11000	900	130	15	1072	389

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JINYU TIRE GROUP

HQ Add: 10th Floor, Block A, Platinum Plaza, No.5 Wenling Road, Laoshan District, Qingdao, China

Tel No.: 0086-400-600-7809

E-mail: TBR2@jinyutires.com

Website: www.jinyutires.com