FARROAD

FARROAD TIRE CATALOGUE



SHANDONG FENGYUAN TIRE MANUFACTURING CO.,LTD.

LOCATION: ZAOZHUANG SHANDONG CHINA
TEL: +86 532 55576727/728
WEB:WWW.FYTIRE.COM
E-MAIL:SALES@FYTIRE.COM

FARROAD

COMPANY INTRODUCTION



Shandong Fengyuan tire manufacturing Co., Ltd., located in Yicheng Economic Development Zone, Zaozhuang City, Shandong Province, is a modern large-scale enterprise integrating R & D, manufacturing and sales of semi steel radial tire, which is owned by Zaozhuang Mining group, a state-owned enterprise owned by Shandong energy group(top 500 in the world). The company is a board member of China Rubber Industry Association, a member of China Chemical industry and engineering Society , a member of China tire intelligent manufacturing and Standardization Alliance, a standing board member of Shandong Rubber Industry Association, and a hundred high-end brand cultivation enterprises in Shandong manufacturing industry.

The plant area of the company covers an area of 528 mu, with a total construction area of 258000 square meters. It is designed and planned to produce 20 million semi steel radial tires annually. At present, it has the capacity of producing 10 million semi steel radial tires annually.

Our company has the world-class advanced equipment and technology, targeted at high-end products. We've built the world-class advanced Semi steel tires production line with great equipments such as VMI-EXXIUM Single-stage Building Machine, Double Calener Machine from Italy, Germany FISCHER Steel Cord Cutting Equipment and Korea DONG-HWA Hydraulic Curing Machine etc. Meanwhile, we have the international advanced low-tempreture rubber mixing and calenering production line, high precision steel cord cutting, automatic single-stage building production line and advanced automatic tyre stereoscopic warehouse. We also have the MES and ERP information management system. Fengyuan Factory won many national awards.

Our company focus on technological innovation, and has established a nationally recognized laboratory and a provincial R & D center. The new low-temperature rubber mixing technology has passed the scientific and technological achievements appraisal of the National Chemical Society, and the carbon nano-tube tire application achievements have passed the scientific and technological achievement appraisal of the National Petrochemical Federation, both reached the international advanced level. We have 108 independent patents and more than 60 national science and technology papers. The level of independent research and development is in the top level in tire industry.

FARROAD

FENGYUAN TIRE

The company has 23 series and nearly 1000 specifications including HP, UHP, C-type light truck, SUV(HT/ AT / MT), Snow tire, Drift tire, Runflat tire, Puncture resistant tire, Anti-static tire, Taxi tire, New energy vehicle tire, etc. The product performance has reached the high-end standard of the second stage of the European labeling method, and has obtained IATF16949, ISO14001, OHSAS18001, etc. It has passed more than 20 certifications, such as U.S. Dot, European ECE, Gulf GCC, Brazil Inmetro, China CCC certification and National military quality management system standard certification. It was the first batch to pass China tire label audit and China green tire certification. It was the first batch to obtain "same line, same standard and same quality" certification tire enterprise, the first low-carbon product certification tire enterprise, Shandong intellectual property demonstration enterprise, the 18th National Quality Award enterprise.

The Shangdong Province Government has assessed FARROAD brand as a International Factory own Brand, The Chinese Excellent Quality and Reputation Brand cross the country, The Shangdong Province Government recommended Brand cross the whole rubber industry. In the meantime, FARROAD brand has been given the TOP TEN Chinese snow tyre brand award. It is broadcasting on CCTV2. We have built more than 100 retail shops all over 31 provinces in Chinese domestic market for the moment. In the oversea market, we exported to over 120 countries which across the five continents. We are working OE projects with more than 10 car manufactures in domestic market, such as BAIC and JMC.

In recent years, the company has seized opportunities of supply-side reform, followed closely the new and old kinetic energy conversion situation, clarified the positioning of high-end development, concentrated on creating industry brands, made the rapid growth of business output value, and good development trend. In 2018, the operating output value exceeded 1.2 billion yuan, successfully listed on the "New OTC Market" and became the 10th public company in the tyre industry. The world's tires rank is 68th (5 places higher than last year), and China's tires rank is 39th (5 places higher than last year). The company's high-quality development has opened up a new situation.







PROFESSIONAL

●UF&DB Testing machine from Japan Kokusai | ●Advanced hydralic curing machine from Korea




●Automatic tiered warehouse facility curing moulds | ●Extruder line From Germany Troester




●Advanced double calender line from Italy



●The most advanced building machines from Holland VMI




●Cutting machine from Germany Fischer



CERTIFICATE

8+ International certificates
23 Product series
1100 sizes

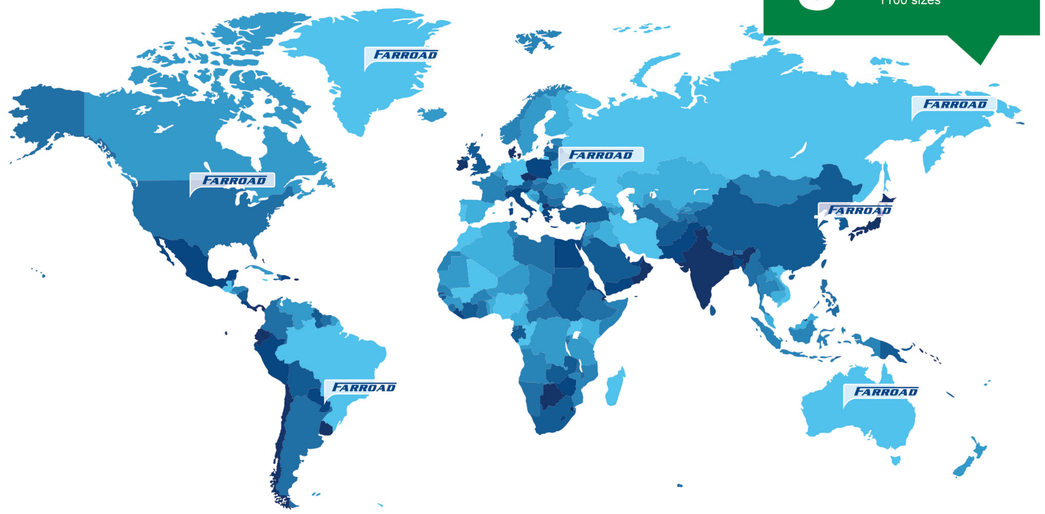


中国国家强制性产品认证证书


ЕВРАЗИЙСКИЙ ЭКОНОМИЧЕСКИЙ СОЮЗ
СЕРТИФИКАТ СООТВЕТСТВИЯ


山东丰源轮胎制造股份有限公司
Shandong Fengyuan Tire Manufacturing Co., Ltd
GSO CONFORMITY CERTIFICATE CCR No: 100553


Certificate of DOT Compliance


RDW
THE NETHERLANDS
(NEDERLAND)
COMMUNICATION


TÜVRheinland
Certificado de Conformidade


ASSOCIAÇÃO LATINO-AMERICANA DE AVALIAÇÃO DA CONFORMIDADE
CERTIFICADO DE CONFORMIDADE DE PRODUTO
MODELO 5 - SBAC



nqa
Certificate of Registration

FARROAD

FRD16 HP





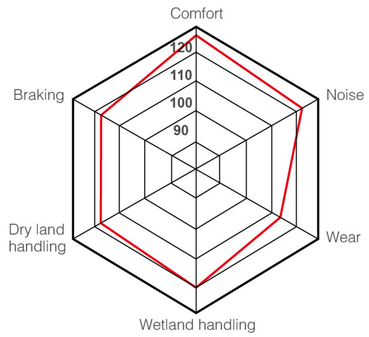

M+S	
RIM SIZE	13-16
SERIES	50-80
SPEED RATING	T/H/V/W

- EXCELLENT WET AND GRIP PERFORMANCE, THE FOUR LONGITUDINAL GROOVES MAKES OUTSTANDING DRAINAGE PERFORMANCE AND EFFECTIVELY PREVENT TIRES FROM SLIPPING SIDEWAYS IN RAINY DAYS. THE CENTRAL STRAIGHT RIB AND THE LATERAL FINE GROOVES MAKE THE TIRE MORE STABLE WHEN DRIVING AT HIGHWAY, WHICH MAKE EXCELLENT ACCELERATION AND BRAKING.

- BALANCED WEAR AND EXCELLENT CONTROL HORIZONTAL GROOVES ADOPTS A TRIMMING DESIGN, WHICH CAN PREVENT THE EDGE OF THE TIRE BLOCK FROM WARPING WHEN DRIVING AT HIGHWAY, EFFECTIVELY AVOIDING EARLY ABNORMAL WEAR OF THE TIRE BLOCK, AND PROLONGING THE LIFE OF THE TIRE. THE TIRE SHOULDER ADOPTS A CONTINUOUS DESIGN, WHICH INCREASES THE CONTACT AREA OF THE TIRE WHEN TURNING, GREATLY IMPROVES THE HANDLING OF THE TIRE, AND MAKES DRIVING SAFER AND MORE STABLE.

Size	Load Index	Speed Rating	Enhanced
155/65R13	73	T	–
155/65R14	75	H	–
155/70R13	75	T	–
155/80R13	79	T	–
165/60R14	75	H/T	–
165/65R13	77	T	–
165/65R14	79	H	–
165/65R15	81	H	–
165/70R13	79	H	–
165/80R13	83	T	–
175/55R15	77	H	–
175/60R13	77	H	–
175/60R15	81	H	–
175/65R15	84	H	–
175/70R13	82	H	–
175/70R14	84	H/T	–
185/55R15	82	V	–
185/55R16	83	V	–
185/60R14	82	H	–
185/60R15	84	H	–
185/60R15	88	H	XL
185/65R14	86	H/T	–
185/65R15	88	H/T	–
185/70R13	86	H/T	–
185/70R14	88	H	–
195/50R15	82	V	–
195/50R16	84	H/V	–
195/55R15	85	V	–
195/55R16	87	H/V	–
195/60R14	86	H	–
195/60R15	88	H/V	–


Size	Load Index	Speed Rating	Enhanced
195/65R14	89	H	–
195/65R15	91	H/V	–
195/70R14	91	H	–
195/70R14	95	H	XL
195/70R15	97	S	XL
195/75R14	92	H	–
205/50R15	86	V	–
205/50ZR16	87	W	–
205/55R16	91	V	–
205/55ZR16	91	W	–
205/55ZR16	94	W	XL
205/60R14	88	H	–
205/60R15	91	H/V	–
205/60R16	92	H/V	–
205/65R15	94	H/V	–
205/65R16	95	V	–
205/70R14	98	T	XL
205/70R15	96	H	–
215/55ZR16	97	W	XL
215/60R16	95	H/V	–
215/65R15	100	H	XL
215/65R16	98	H	–
215/70R15	98	T	–
215/70R16	100	H/T	–
225/50ZR16	96	W	XL
225/55ZR16	99	W	XL
225/60R15	96	H	–
225/60R16	102	H	XL
225/70R15	100	H	–
225/70R16	103	T	–

FARROAD

FRD18 HP





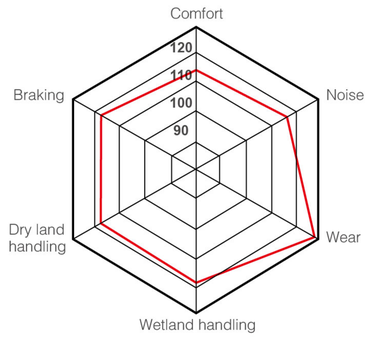

M+S	
RIM SIZE	13-15
SERIES	55-80
SPEED RATING	S/T/H/V

- ADVANCED STRUCTURE DESIGN:
  USING NEW TYPE NYLON CAP LAYER WHICH IS INTACT AND NO JOINTS, EFFECTIVELY PREVENT BELT FROM SLIDING, PROVIDE PERFECT STABILITY PERFORMANCE EVEN IN THE STATUS OF TURNING AT HIGH SPEED.

- EXCELLENT WEAR-RESISTANCE COMPOUND TECHNOLOGY
  OPTIMIZED WEAR-RESISTANCE COMPOUND MAKE TIRES TO BE SUITABLE FOR ROUGH ROAD, LONGER MILEAGE, ENERGY SAVING AND ECO-FRIENDLY.


Size	Load Index	Speed Rating	Ply rating
155/65R13	73	T	–
155/65R13	73	H	–
155/65R14	75	T	–
155/65R14	75	H	–
155/65R14	75	T	–
155/65R14	75	H	–
155R13C	85/83	S	6PR
165/60R14	75	T	–
165/60R14	75	H	–
165/65R13	77	T	–
165/65R14	79	T	–
165/65R14	79	H	–
165/70R13	79	T	–
165/70R13C	88/86	S	6PR
165/70R14	81	H	–
165R13C	91/89	S	6PR
165R13LT	89/88	S	6PR
175/60R13	77	T	–
175/60R13	77	H	–
175/60R14	79	H	–
175/60R14	83	H	–
175/65R14	82	H	–
175/65R15	84	T	–
175/65R15	84	H	–
175/70R13	82	T	–
175/70R14	84	T	–

Size	Load Index	Speed Rating	Ply rating
175/70R14LT	95/93	S	6PR
175/75R14C	99/98	S	8PR
175/75R14LT	99/98	S	8PR
185/55R15	82	H	–
185/55R15	82	V	–
185/60R14	82	H	–
185/60R15	84	H	–
185/60R15	88	H	–
185/65R14	86	T	–
185/65R14	86	H	–
185/65R15	88	T	–
185/65R15	88	H	–
185/70R13	86	T	–
185/70R14	88	T	–
185/80R14	91	T	–
185R14C	102/100	T	8PR
195/55R15	85	V	–
195/60R14	86	H	–
195/60R15	88	H	–
195/65R15	91	H	–
195/70R14	91	H	–
195R14C	106/104	S	8PR
195R14LT	105/103	S	8PR
205/70R14	95	H	–



FRD26 UHP



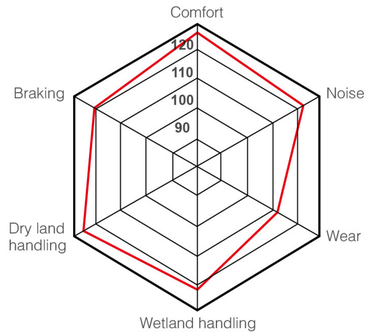

M+S	
RIM SIZE	15-20
SERIES	30-65
SPEED RATING	H/V/W/Y

- THE "S"-SHAPED GROOVES EFFECTIVELY DISPERSE THE RIGIDITY OF THE PATTERN, REDUCE DRIVING NOISE, WHICH MAKES THE DRIVING MORE COMFORTABLE AND QUITE. WITH THE USE OF ADVANCED WHITE CARBON BLACK FORMULATION SYSTEM AND RUBBER MIXING PROCESS, THE ROLLING RESISTANCE OF TIRES CAN BE EFFECTIVELY REDUCED.
- THE LARGE SHOULDER BLOCKS ENDOW THE TIRE BLOCKS WITH SUFFICIENT RIGIDITY AND GROUND CONTACT AREA, BRINGING SUPERB HANDLING AND STRONG SPORTINESS. THE STRAIGHT-RUNNING RIB DESIGN WITH SAWTOOTH ON THE OUTSIDE INCREASES THE CONTACT AREA OF THE TIRE WHEN TURNING, AND GREATLY IMPROVES THE HANDLING AND STABILITY OF THE TIRE.
- THE DURABLE AND WEAR-RESISTANT BIONIC DESIGN, THE GROOVES OF THE CENTER AND OUTER RIBS ADOPT A TRIMMING DESIGN, WHICH CAN PREVENT THE EDGE OF THE TIRE BLOCK FROM WARPING WHEN DRIVING AT HIGHWAY, AND EFFECTIVELY AVOID EARLY ABNORMAL WEAR OF THE TIRE BLOCK.

Size	Load Index	Speed Rating	Enhanced
195/45R16	84	V	XL
195/50R15	82	V	–
195/55R15	85	V	–
195/60R16	89	H	–
205/40ZR17	84	W	XL
205/45ZR16	87	W	XL
205/45ZR17	88	W	XL
205/50ZR16	91	W	XL
205/50ZR17	93	W	XL
205/55ZR16	91	W	–
205/55ZR16	94	W	XL
205/55ZR17	95	W	XL
215/35ZR18	84	W	XL
215/35ZR19	85	W	XL
215/40ZR16	86	W	XL
215/40ZR17	87	W	XL
215/40ZR18	89	W	XL
215/45ZR16	90	W	XL
215/45ZR17	91	W	XL
215/50ZR17	95	W	XL
215/55ZR16	97	W	XL
215/55ZR17	98	W	XL
225/30ZR19	84	W	XL
225/35ZR19	88	W	XL
225/35ZR20	90	W	XL
225/40ZR17	90	W	XL
225/40ZR18	92	W	XL
225/45ZR17	91	W	–
225/45ZR17	94	W	XL
225/45ZR18	95	W	XL
225/50ZR16	96	W	XL
225/50ZR17	98	W	XL
225/50ZR18	99	W	XL
225/55ZR16	99	W	XL
225/55ZR17	101	W	XL
225/55ZR18	102	W	XL
225/55ZR19	99	W	–
225/60R17	99	V	–
225/60R18	104	H/V	XL

Size	Load Index	Speed Rating	Enhanced
225/65R16	100	H	
235/35ZR19	91	W	XL
235/35ZR20	92	W	XL
235/40ZR18	95	W	XL
235/45ZR17	97	W	XL
235/45ZR18	98	W	XL
235/45ZR19	99	W	XL
235/50ZR17	96	W	
235/50ZR17	100	W	XL
235/50ZR18	101	W	XL
235/55ZR17	103	W	XL
235/55ZR18	104	W	XL
235/60R15	98	V	
235/60R17	102	H/V	
235/65R16	103	H	
245/35ZR19	93	W	XL
245/35ZR20	95	Y	XL
245/40ZR17	95	W	XL
245/40ZR18	97	W	XL
245/40ZR19	98	W	XL
245/45ZR17	99	W	XL
245/45ZR18	100	W	XL
245/45ZR19	102	W	XL
245/50ZR18	100	W	
245/60R15	101	V	
255/35ZR18	94	Y	XL
255/35ZR19	96	W	XL
255/35ZR20	97	W	XL
255/40ZR18	99	W	XL
255/40ZR19	100	W	XL
255/45ZR18	103	W	XL
255/50ZR19	107	W	XL
255/55R18	109	V	XL
265/35ZR18	97	Y	XL
265/45ZR20	108	W	XL
265/50R20	111	V	XL
275/35ZR19	100	W	XL
275/40ZR20	106	W	XL

FARROAD


FRD66

ALL SEASON SUV TIRE





M+S	
RIM SIZE	15-20
SERIES	50-75
SPEED RATING	S/T/H/V

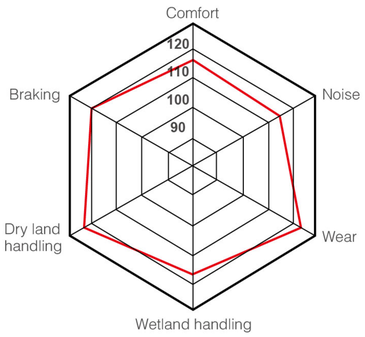

- Four wide grooves design provide effective drainage and sufficient wet safety performance.
- Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance on wet land.
- The compact shoulder design provide excellent handling performance with low noise.
- Multiple blade groove pattern provide excellent grip and handling performance on wet land.


Size	Load Index	Speed Rating	Enhanced
205/70R15	100	T	XL
215/55R18	95	V	–
215/60R17	96	H	–
215/65R16	102	H	XL
215/65R17	99	H	–
215/70R16	100	T	–
215/75R15	100	T	–
225/50R18	99	H	XL
225/60R17	99	H	–
225/60R18	100	H	–
225/65R17	106	H	XL
225/65R17	102	H	–
225/70R16	103	T	–
225/75R15	102	T	–
235/50R19	99	V	–
235/55R17	103	V	XL
235/55R18	104	V	XL
235/60R16	100	V	–
235/60R17	102	H	–
235/60R18	107	H	XL
235/65R16	103	H	–
235/65R17	108	H	XL
235/65R18	110	H	XL
235/70R16	106	T	–
235/75R15	105	S	–
245/55R19	103	V	–
245/60R18	105	H/V	–
245/65R17	111	H	XL

Size	Load Index	Speed Rating	Enhanced
245/70R16	107	T	–
245/70R16	111	H	XL
245/70R17	110	H	–
255/50R19	107	V	XL
255/55R18	109	V	XL
255/55R19	111	V	XL
255/60R17	106	V	–
255/60R18	112	V	XL
255/65R16	109	H	–
255/65R17	110	T/H	–
255/70R15	108	T	–
255/70R16	111	T	–
265/50R19	110	V	XL
265/60R18	110	H	–
265/65R17	116	H	XL
265/65R17	112	H	–
265/65R18	114	H	–
265/70R15	112	T	–
265/70R16	112	T	–
265/70R17	115	T	–
265/70R18	116	T	–
275/45R19	108	V	XL
275/55R19	111	V	–
275/65R17	115	H	–
275/65R18	116	H	–
275/70R16	114	T	–
285/50R20	116	V	XL
285/65R17	116	H	–

FARROAD





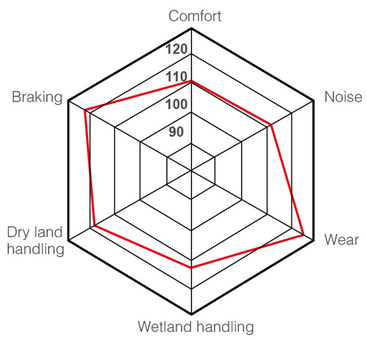

M+S	
RIM SIZE	15-18
SERIES	55-85
SPEED RATING	Q/R/S/T/H

- Prevent stone nipped, enhance the ability to get rid of the stone.
- Enhance the block rigidity, endurance, weight-carrying ability and steering qualities during driving.
- Solid staggered central rib design ensures straight-line driving stability and safety.
- Promote the grip performance on wet and dry land, enhance the tractive performance.

Size	Load Index	Speed Rating	Ply rating
215/70R16	100	T	–
225/70R16	103	T	–
235/60R18	107	H	–
235/70R16	106	T	–
245/70R16	107	T	–
255/55R18	109	H	–
255/70R16	111	T	–
265/60R18	110	H	–
265/65R17	112	T	–
265/70R16	112	T	–
265/70R17	115	T	–
275/65R17	115	T	–
275/70R16	114	T	–
285/60R18	120	H	–
215/75R15LT	100/97	R/Q	6PR
215/85R16LT	115/112	R/Q	10PR
225/75R15LT	108/104	Q	8PR

Size	Load Index	Speed Rating	Ply rating
LT225/75R15	108/104	Q	8PR
225/75R16LT	115/112	Q	10PR
235/80R17LT	120/117	R	10PR
235/85R16LT	120/116	R	10PR
245/70R17LT	119/116	S	10PR
245/75R16LT	120/116	R	10PR
245/75R17LT	121/118	R	10PR
265/70R17LT	121/118	S	10PR
285/70R17LT	121/118	S	8PR
265/70R18LT	124/121	S	10PR
275/65R18LT	123/120	S	10PR
LT275/65R18	123/120	S	10PR
285/75R16LT	126/123	R	10PR
30×9.50R15LT	104	Q	6PR
31*10.50R15LT	109	S	6PR
205R16C	110/108	S	8PR
215R15C	113/111	S	8PR

FARROAD


FRD866 RFT

RUNFLAT TIRE





M+S	
RIM SIZE	17-20
SERIES	40-55
SPEED RATING	V/W/Y

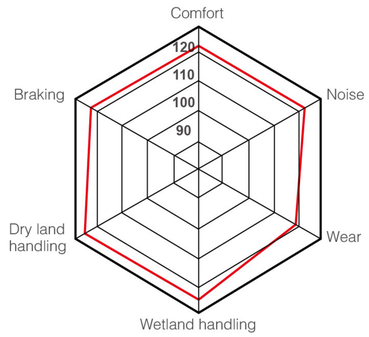

- The special block shoulder pattern design effectively protects the sidewall of the tire , which can protect the tire from being punctured and losing air pressure , and the tire can continue to drive after the complete loss of pressure. At zero air pressure, the self-supporting structure supports the weight of the car. It can run for more than an hour at 80km when it is punctured without air.
- Smooth asymmetric pattern, ensuring better controlling performance of outside while enhancing drainage of inside.
- Four wide deep grooves keep excellent wetting performance and handling stability.
- Outside shoulder reinforcement improving handling performance at curve, effectively preventing abnormal wear.
- Bended steel groove, effectively reducing the noise while enlarging ground contact area.

UHP Size	Load Index	Speed Rating	Enhanced
215/55ZR18	99	W	XL
225/45ZR19	96	W	XL
225/55R19	99	V	–
235/45ZR18	98	W	XL
235/45ZR19	99	W	XL
235/55ZR20	105	W	XL
235/60R18	107	H	XL
235/60R18	107	V	XL
245/45ZR17	99	W	XL
245/45ZR20	103	W	XL
245/55ZR19	103	W	–
255/40ZR20	101	W	XL
255/45ZR19	104	W	XL
255/55ZR20	110	W	XL
265/40ZR20	104	W	XL
275/40ZR18	99	Y	–
275/40ZR20	106	W	XL
275/45ZR20	110	W	XL
285/40ZR19	103	Y	–

Runflat Size	Load Index	Speed Rating	Enhanced
225/45ZRF18	91	W	–
225/50ZRF17	94	W	–
225/55ZRF17	97	W	–
245/45ZRF18	96	W	–
245/50ZRF18	100	W	–
255/40ZRF18	95	W	–
255/50ZRF19	103	W	–
255/55ZRF18	105	W	–
225/55RF19	99	V	–


FARROAD

FRD868 SRT

RUNFLAT TIRE





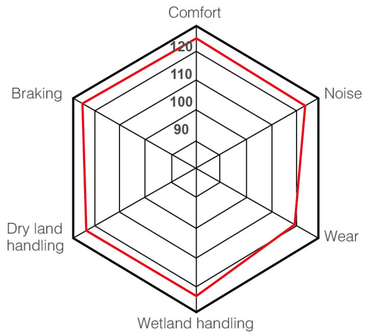

M+S	
RIM SIZE	18-19
SERIES	40-55
SPEED RATING	V/W/Y

- The special block shoulder pattern design effectively protects the sidewall of the tire , which can protect the tire from being punctured and losing air pressure , and the tire can continue to drive after the complete loss of pressure. At zero air pressure, the self-supporting structure supports the weight of the car. It can run for more than an hour at 80km when it is punctured without air.
- Special high-elastic polymer and Low-heating technology, combined with the high resistance reversion vulcanization system containing special anti-fatigue agent, can ensure the high hardness of rubber support while improving the fatigue resistance and reducing heat generation. The rigidity of the material is improved under high temperature condition, and the support of the tire side is improved when the tire side is driven at high speed under the condition of air shortage.
- Using a new structure design, on the basis of optimizing the weight of the product, comprehensively improve the tire under the condition of air safety performance, bring high quality high-speed control stability.

UHP Size	Load Index	Speed Rating	Enhanced	Max. Load (kg)	Max. Pressure (kpa)
235/50R18	97	V	–	730	300
235/55R19	101	V	–	825	300
245/40R19	98	Y	XL	750	340
245/45R19	102	W	XL	850	340
275/40R19	101	Y	–	825	300


Runflat Size	Load Index	Speed Rating	Enhanced	Max. Load (kg)	Max. Pressure (kpa)
235/50R18	97	V	–	730	300
235/55R19	101	V	–	825	300
245/40R19	98	Y	XL	750	340
245/45R19	102	W	XL	850	340
245/50R19	105	W	XL	925	340
275/40R19	101	Y	–	825	300

FARROAD

EXTRA FRD88
UHP





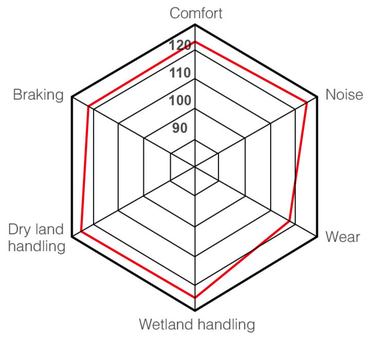

M+S	
RIM SIZE	17-24
SERIES	30-60
SPEED RATING	W/Y

- “Flying wing” large inclination with single guide symmetrical pattern , ensure the tire's super visual speed , drainage and steering performance.
- Four criss-cross grooves design, ensure the excellent drainage and handling performance.
- Center wide rib ensure the guide performance.
- Wide avalible groove design avaoid the air flow, decrease inordinate wear , increase tire life time.

Size	Load Index	Speed Rating	Enhanced
225/30ZR22	87	W	XL
235/30ZR20	88	W	XL
235/30ZR22	90	W	XL
235/45ZR18	98	W	XL
235/50ZR19	103	W	XL
235/55ZR19	105	W	XL
235/65R18	110	V	XL
245/30ZR22	92	W	XL
245/35ZR19	93	W	XL
245/35ZR20	95	W	XL
245/45ZR19	102	W	XL
245/45ZR20	103	W	XL
245/50ZR20	102	W	–
245/55ZR19	103	W	–
255/30ZR22	95	W	XL
255/30ZR24	97	W	XL
255/40ZR18	99	W	XL
255/45ZR17	98	W	–
255/45ZR19	104	W	XL
255/45ZR20	105	W	XL
255/50ZR20	109	Y	XL
255/55ZR20	110	W	XL
265/30ZR19	93	W	XL
265/30ZR22	97	W	XL
265/35ZR22	102	W	XL


Size	Load Index	Speed Rating	Enhanced
265/40ZR18	101	W	XL
265/40ZR20	104	Y	XL
265/40ZR22	106	W	XL
265/50ZR20	111	W	XL
275/25ZR24	96	W	XL
275/30ZR24	101	W	XL
275/35ZR20	102	W	XL
275/40ZR19	105	W	XL
275/40ZR20	106	W	XL
275/45ZR20	110	W	XL
275/55ZR20	117	W	XL
275/60R20	115	V	–
275/60ZR20	115	W	–
285/35ZR22	106	W	XL
285/45ZR19	111	W	XL
285/45ZR22	114	W	XL
285/50ZR20	116	W	XL
295/25ZR22	97	Y	XL
295/30ZR22	103	W	XL
295/35ZR24	110	W	XL
305/35ZR24	112	W	XL
305/40ZR22	114	W	XL
305/45ZR22	118	W	XL
315/35ZR20	110	W	XL

FARROAD

FRD888 UHP





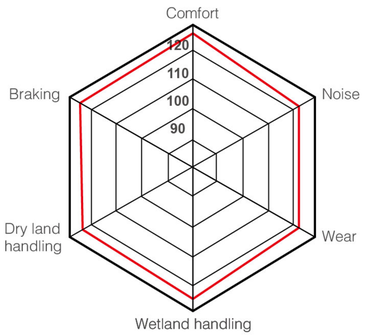

M+S	
RIM SIZE	17-20
SERIES	40-55
SPEED RATING	W

- SILENT, COMFORTABLE, ENERGY-SAVING AND ENVIRONMENT-FRIENDLY TREAD USES "S" PATTERN GROOVES, EFFECTIVELY DISPERSING THE PATTERN RIGIDITY, REDUCING DRIVING NOISE AND IMPROVING COMFORT. WITH THE USE OF ADVANCED WHITE CARBON BLACK FORMULA SYSTEM AND RUBBER MIXING PROCESS, THE ROLLING RESISTANCE OF TIRES CAN BE EFFECTIVELY REDUCED.
- THE ADVANCED HANDLING AND WIDE SHOULDER PATTERN BLOCK GUARANTEE THE TIRE BLOCK WITH ENOUGH RIGIDITY AND GROUNDING AREA, BRINGING EXQUISITE HANDLING AND STRONG SPORT PERFORMANCE. THE STRAIGHT RIB DESIGN WITH SAWTOOTH ON THE OUTSIDE INCREASES THE GROUNDING AREA OF THE TIRE WHEN TURNING, AND GREATLY IMPROVES THE HANDLING AND STABILITY OF THE TIRE.
- THE BALANCED AND DURABLE ANTI-WEAR BIONIC DESIGN, THE GROOVE OF THE CENTER AND THE OUTER SIDE OF THE PATTERN STRIP ADOPT THE TRIMMING DESIGN, WHICH CAN PREVENT THE EDGE OF THE MOLD BLOCK FROM WARPING WHEN DRIVING AT HIGH SPEED, AND EFFECTIVELY AVOID THE EARLY ABNORMAL WEAR OF THE MOLD BLOCK. THE INNER SIDE IS DESIGNED WITH A WILLOW-LIKE BIONIC PATTERN BLOCK WITH VARIABLE DEPTH, WHICH IS DYNAMIC AND CAN EFFECTIVELY PREVENT ABNORMAL WEAR AT THE SHARP CORNERS OF THE PATTERN BLOCK.

Size	Load Index	Speed Rating	Enhanced
205/50R17	93	W	XL
205/55R17	95	W	XL
215/50R17	95	W	XL
215/55R17	98	W	XL
225/45R17	94	W	XL
225/45R18	95	W	XL
225/50R17	98	W	XL
225/55R17	101	W	XL
225/55R18	102	W	XL
235/45R18	98	W	XL
245/45R18	100	W	XL
215/45R17	91	W	XL
225/40R18	92	W	XL
225/45R19	96	W	XL

Size	Load Index	Speed Rating	Enhanced
225/55R19	103	W	XL
235/45R17	97	W	XL
235/50R17	96	W	–
235/55R20	102	W	–
245/40R18	97	W	XL
245/45R17	99	W	XL
245/45R20	103	W	XL
245/50R18	100	W	–
255/45R18	103	W	XL
255/45R19	104	W	XL
255/45R20	105	W	XL
255/50R20	109	W	XL
275/45R20	110	W	XL


FARROAD

FRD96

COMMERCIAL LIGHT TRUCK TIRE





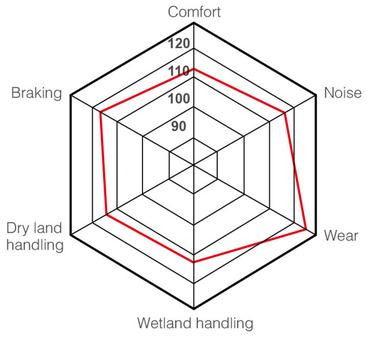

M+S	
RIM SIZE	14-16
SERIES	60-75
SPEED RATING	N/Q/R/S/T

- Three longitudinal grooves enhance water evacuation.
- Silent groove design decreases noise while tire rolling effectively.
- Special more sipes and grooves design enhances the wet grip performance.
- Enhanced shoulder design increases driving stability with high load.

Size	Load Index	Speed Rating	Ply rating
175/65R14C	90/88	T	6PR
175/75R16C	98/96	Q	6PR
185/75R16C	104/102	S	8PR
195/60R16C	99/97	T	6PR
195/65R16C	104/102	T	8PR
195/70R15C	104/102	S	8PR
195/75R16C	107/105	S	8PR
195R14C	106/104	S	8PR
195R14LT	105/103	S	8PR
195R15C	106/104	S	8PR
195R15LT	106/104	S	8PR
205/65R16C	107/105	T	8PR
205/70R15C	106/104	S	8PR
205/75R16C	110/108	R	8PR
205R14C	109/107	N	8PR
215/60R16C	103/101	T	6PR
215/65R16C	109/107	T	8PR

Size	Load Index	Speed Rating	Ply rating
215/70R15C	109/107	S	8PR
215/75R14C	112/110	S	8PR
215/75R16C	116/114	R	10PR
215/75R16LT	112/109	R	10PR
225/65R16C	112/110	T	8PR
225/70R15C	112/110	S	8PR
225/70R15LT	106/103	S	8PR
225/75R16C	121/120	R	10PR
235/65R16C	115/113	T	8PR
6.50R15LT	106/101	N	10PR
6.50R16C	108/107	N	10PR
6.50R16LT	107/102	N	10PR
7.00R15LT	109/105	N	10PR
7.00R16C	117/116	N	12PR
7.00R16LT	115/110	N	12PR
7.50R16C	121/120	N	12PR





- Solid staggered central rib design ensures straight-line driving stability and safety.
- Enhance the block rigidity, endurance, weight-carrying ability and steering qualities during driving.
- Promote the grip performance on wet and dry land, enhance the tractive performance.
- Prevent stone nipped, enhance the ability to get rid of the stone.

M+S	
RIM SIZE	15-20
SERIES	50-75
SPEED RATING	R/S/T/H

Size	Load Index	Speed Rating	Ply rating
265/50R20	111	H	–
265/60R18	114	T	–
265/65R17	116	T	–
285/50R20	116	H	–
285/60R18	116	T	–
31 x 10.50R15LT	109	R	6PR
265/70R16LT	121/118	S	10PR
LT265/70R16	121/118	S	10PR
235/75R15LT	116/113	R	10PR
LT235/75R15	110/107	R	8PR





- Block block shoulder design increases the intensity of the pattern.The high and low shoulder and the inside and outside shoulder are interlaced to greatly improve the passing performance. The interlaced middle block and different design on both side improve the cross-country performance. Fearless road conditions, professional MT tire.

M+S	
RIM SIZE	15-20
SERIES	70-75
SPEED RATING	Q

Size	Load Index	Speed Rating	Ply rating
35 x 12.50R17LT	121	Q	10PR
33 x 12.50R18LT	118	Q	10PR
LT235/75R15	116/113	Q	10PR
235/75R15LT	116/113	Q	10PR
30 x 9.50R15LT	104	Q	6PR
31 x 10.50R15LT	109	Q	6PR
LT245/75R16	120/116	Q	10PR
245/75R16LT	120/116	Q	10PR
LT265/75R16	123/120	Q	10PR
265/75R16LT	123/120	Q	10PR
LT285/75R16	126/123	Q	10PR
285/75R16LT	126/123	Q	10PR
LT265/70R17	121/118	Q	10PR
265/70R17LT	121/118	Q	10PR
LT285/70R17	121/118	Q	10PR
285/70R17LT	121/118	Q	10PR
33 x 12.50R20LT	114	Q	10PR
35 x 12.50R20LT	121	Q	10PR
35 x 12.50R18LT	123	Q	10PR





- Perfect performance from the grip and mute effects. Excellent pattern design to bring you a reliable carrying capacity and comfortable driving experience. Utilize the color formula and new technology to ensure the origin performance, to enhance the visual effects.

M+S	
RIM SIZE	14-15
SPEED RATING	S

Size	Load Index	Speed Rating	Ply rating
185R14C	102/100	S	8PR
195R14C	106/104	S	8PR
195R15C	106/104	S	8PR





- Single Guide large angle pattern design, ensure the tire’ s ultimate handling performance, and take you the most pure driving pleasure. High wear-resistant compound, make the tires to be the most excellent track performance.

M+S	
RIM SIZE	15-17
SERIES	40-50
SPEED RATING	V

Size	Load Index	Speed Rating	Enhanced
195/50R15	82	V	–
205/40R17	84	V	XL
225/45R17	94	V	XL



TAXI PLUS



- Three wide and deep longitudinal grooves for excellent wetland drainage and handling stability.
  The 9.00mm deep tread groove design and highly wear-resistant tread rubber formulation provide superb wear resistance.
- Wide, continuous shoulder tread blocks for improved lateral rigidity and traction
- The Y-line fine tread pattern design makes the tyres wear evenly, reduces rolling resistance effectively and saves energy and fuel.

M+S	
RIM SIZE	14-15
SERIES	60-70
SPEED RATING	H

Size	Load Index	Speed Rating	Enhanced
175/65R14	86	H	XL
175/70R14	84	H	–
185/60R14	82	H	–
185/65R15	88	H	–
195/60R14	86	H	–
195/60R15	88	H	–
195/65R15	91	H	–
205/65R15	94	H	–
175/65R14	86	H	XL
175/70R14	84	H	–
185/60R14	82	H	–
185/65R15	88	H	–
195/60R14	86	H	–
195/60R15	88	H	–
195/65R15	91	H	–
205/65R15	94	H	–



ECO PLUS



- Tire shoulders are reinforced to ensure the strength of the shoulders and avoid bias wear.
- The design of numerous three-dimensional corner cuts improves the three-dimensional appearance and resistance to abnormal wear.
- Four wide and deep longitudinal grooves for excellent wetland drainage and handling stability.
- Computer and gene combination simulation design to get the best combination of pattern and noise.

M+S	
RIM SIZE	12
SERIES	70-80
SPEED RATING	N/Q/T

Size	Load Index	Speed Rating	Ply rating
145/70R12	69	Q	–
145/80R12	74	Q	–
155/70R12	73	Q	–
155/80R12	77	Q	–
155/80R12	77	T	–
155R12C	83/81	Q	6PR
155R12C	83/81	N	6PR
155R12LT	83/81	Q	6PR
155R12LT	83/81	N	6PR